

Bassleader

SUBWOOFER



Bassleader



Bassleader 112 BP



Bassleader 112 R



Bassleader 112 T

SUBWOOFER


Bassleader

Enclosure:

- Bandpass subwoofer with solid plexiglas window (BP)
- Bass reflex subwoofer (R)
- Bass reflex tube (T)
- Air-flow optimized bass-reflex ports
- Powder-coated protection bars (R)
- Powder-coated protection grille (T)
- Nickel-plated screw terminal
- Anti-skid carpet with **HD** stitch

Woofers:

- 12" high power driver with pole core ventilation and 2" voice coil
- Solid steel basket with additional voice coil ventilation
- PP design dustcap
- Long excursion double surround
- Multi-layer, coated structure paper cone

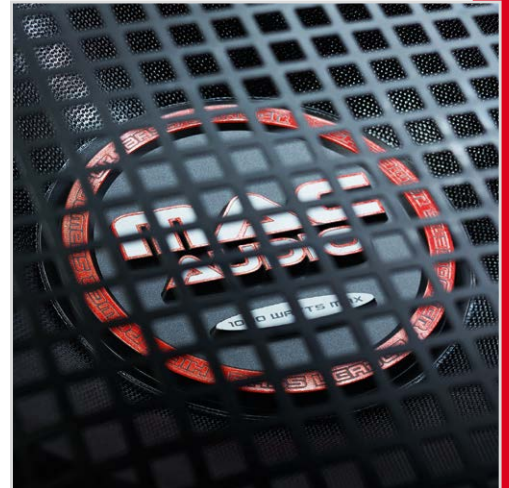

SUBWOOFER

Bassleader 112 BP

Principle	Bandpass subwoofer with 12" driver
Power Handling RMS/max	300 / 1000 Watts
Impedance	4 Ω
Frequency response	23 – 500 Hz
SPL	90 dB
Chassis Material	Multi-layer, coated paper cone
Dimensions (WxHxD/D)	515 x 365 x 260/315 mm
Weight	12.5 kg



SUBWOOFER

Bassleader 112 R

Principle	Bass reflex subwoofer with 12" driver
Power Handling RMS/max	300 / 1000 Watts
Impedance	4 Ω
Frequency response	24 – 500 Hz
SPL	90 dB
Chassis Material	Multi-layer, coated paper cone
Dimensions (WxHxD/D)	515 x 365 x 225/280 mm
Weight	10 kg

SUBWOOFER



Bassleader 112 T

Principle	Bass reflex tube with 12" driver
Power Handling RMS/max	300 / 1000 Watts
Impedance	4 Ω
Frequency response	22 – 500 Hz
SPL	90 dB
Chassis Material	Multi-layer paper cone
Dimensions (\varnothing x L)	335 x 465 mm
Weight	6 kg



SUBWOOFER