

MAC AUDIO


WRS



WRS 16.2



WRS 13.2

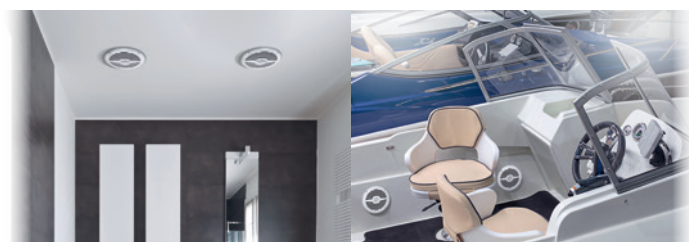

HIGHLIGHTS

- 2 way coaxial speaker
- Specially designed for applications in the maritime sector and damp locations
- Water resistant according to standard IPX 6
- UV resistant according to standard ASTM-D4329
- Salt water resistant according to standard ASTM-B117
- Solid ABS basket
- Internal high-power ferrite magnet system
- Dynamic surround for high efficiency
- Coated polypropylene cone (woofer)
- Integrated design speaker grille

Specifications	WRS 16.2	WRS 13.2
System	2 way coax system	2 way coax system
Power handling RMS/max. (W)	70/250	60/200
Impedance (Ω)	8	8
Frequency response (Hz)	28 – 24.000	32 – 24.000
Crossover frequencies (Hz)	3800	3800
SPL (dB)	91	90
DIN-Ø (mm)	Woofer 165	Woofer 130
Outer diameter (mm)	Woofer 179	Woofer 147
Cutting Out (mm)	Woofer 131	Woofer 111
Mounting depth (mm)	Woofer 60	Woofer 48
Mounting Height (mm)	Woofer 23	Woofer 19
Membran Material	Woofer: coated polypropylene cone, tweeter: polycarbonate	
Art.No.	133 3060	133 3050
EAN.	40 23037 33060 1	40 23037 33050 2